04 FAQs

 Issue
 01

 Date
 2025-04-30





Copyright © Huawei Cloud Computing Technologies Co., Ltd. 2025. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Cloud Computing Technologies Co., Ltd.

Trademarks and Permissions

NUAWEI and other Huawei trademarks are the property of Huawei Technologies Co., Ltd. All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei Cloud and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Cloud Computing Technologies Co., Ltd.

Address: Huawei Cloud Data Center Jiaoxinggong Road Qianzhong Avenue Gui'an New District Gui Zhou 550029 People's Republic of China

Website: https://www.huaweicloud.com/intl/en-us/

Contents

1 General FAQs	1
1.1 What Is FunctionGraph?	1
1.2 Do I Need to Apply for Any Compute, Storage, or Network Services When Using FunctionGraph?	1
1.3 Do I Need to Deploy My Code After Programming?	1
1.4 How Do I Obtain a Token?	2
1.5 What Runtimes Does FunctionGraph Support?	3
1.6 How Much Disk Space Is Allocated to Each FunctionGraph Function?	4
1.7 Does FunctionGraph Support Function Versioning?	4
1.8 How Does a Function Read or Write Files?	4
1.9 How Do I Set a Proxy When Using CLI?	5
1.10 Does FunctionGraph Support Function Extension?	5
1.11 Which Permissions Are Required for an IAM User to Use FunctionGraph?	5
1.12 How Can I Create an ODBC Drive-based Python Dependency Package for Database Query?	5
1.13 What Is the Quota of FunctionGraph?	6
1.14 What Chinese Fonts Does FunctionGraph Support?	6
1.15 How Does FunctionGraph Implement Domain Name Resolution?	6
1.16 How Do I Use a Domain Name to Access an API Registered with API Gateway (Dedicated)?	9
1.17 What Are the Common Application Scenarios of FunctionGraph?	9
1.18 Why Can't the API Gateway Domain Name Bound to a Service Be Resolved During Function	
Invocation?	
1.19 Does FunctionGraph Support Synchronous Transmission at the Maximum Intranet Bandwidth?	
1.20 What If the VPC Quota Is Used Up?	
1.21 How Can I Print Info, Error, or Warn Logs?	
1.22 Can I Set the Domain Name of an API to My Own Domain Name?	
1.23 Can I Change the Runtime?	
1.24 Can I Change a Function's Name?	
1.25 Why Is Message "failed to mount exist system path" Displayed?	
1.26 How Do I Obtain Uploaded Files?1.27 Why Can't I Receive Responses for Synchronous Invocation?	
1.28 What Should I Do If the os.system("command &") Execution Logs Are Not Collected?	
1.29 Which Directories Can Be Accessed When a Custom Runtime Is Used?	
1.30 Which Minor Versions of Python 3.6 and 3.9 Are Supported?	
1.31 Which Actions Can Be Used Instead of a VPC Administrator Agency for VPC Access?	12

1.32 What Are the Possible Causes for Function Timeout?	12
1.33 How Do I Obtain the Code of a Function?	13
1.34 Do You Have Sample Code for Initializers?	13
1.35 How Do I Enable Structured Log Query?	13
1.36 Can I Enable a Listening Port in a Function to Receive External TCP Requests via EIP?	17
1.37 Does FunctionGraph Support Domain Name Resolution?	17
1.38 How Do I Obtain the Source IP Address of an HTTP Request Initiated by a Function?	17
2 Function Creation FAQs	20
2.1 Can I Add Threads and Processes in Function Code?	20
2.2 What Are the Rules for Packaging a Function Project?	20
2.3 How Does FunctionGraph Isolate Code?	26
2.4 How Do I Create the Bootstrap File for an HTTP Function?	26
3 Trigger Management FAQs	27
3.1 What Events Can Trigger a FunctionGraph Function?	
3.2 What If Error Code 500 Is Reported When Functions that Use APIG Triggers Return Strings?	27
3.3 What Do LATEST and TRIM_HORIZON Mean in DIS Trigger Configuration?	28
3.4 How Do I Use an APIG Trigger to Invoke a Function?	28
3.5 How Does a Function Obtain the Request Path or Parameters When Using an APIG Trigger?	
3.6 Can I Configure a Kafka Trigger in a Different Subnet from My Function?	29
4 Dependency Management FAQs	30
4.1 What Is a Dependency?	30
4.2 When Do I Need a Dependency?	30
4.3 What Are the Precautions for Using a Dependency?	30
4.4 What Dependencies Does FunctionGraph Support?	30
4.5 Does FunctionGraph Support Class Libraries?	32
4.6 How Do I Use Third-Party Dependencies on FunctionGraph?	32
4.7 How Do I Create Function Dependencies?	32
4.8 How Do I Create a Dependency on the FunctionGraph Console?	
4.9 How Do I Add a Dependency to a Function?	35
5 Function Execution FAQs	36
5.1 How Long Does It Take to Execute a FunctionGraph Function?	
5.2 Which Steps Are Included in Function Execution?	36
5.3 How Does FunctionGraph Process Concurrent Requests?	
5.4 What If Function Instances Have Not Been Executed for a Long Time?	37
5.5 How Can I Speed Up Initial Access to a Function?	37
5.6 How Do I Know the Actual Memory Used for Function Execution?	
5.7 Why Is My First Request Slow?	
5.8 What Do I Do If an Error Occurs When Calling an API?	
5.9 How Do I Read the Request Header of a Function?	
5.10 Can the Synchronous Execution Interface Be Invoked on a Private Network?	38
5.11 How Do I Check the Memory Usage When Seeing "runtime memory limit exceeded"?	

5.12 How Do I Troubleshoot "CrashLoopBackOff"?	
5.13 After I Updated an Image with the Same Name, Reserved Instances Still Use the Old Imag	ge. What
Can I Do?	
6 Function Configuration FAQs	40
6.1 Can I Set Environment Variables When Creating Functions?	40
6.2 Can I Enter Sensitive Information in Environment Variables?	
6.3 How Do I Use a Function to Invoke a Subfunction?	40
6.4 How Do I Use the Versions and Aliases of an HTTP Function with an APIG Trigger for Gray	
7 External Resource Access FAQs	
7.1 How Does a Function Access the MySQL Database?	44
7.2 How Does a Function Access Redis?	45
7.3 What Do I Do If My Function Cannot Connect to Redis Through a VPC?	46
7.4 How Do I Configure External Network Access?	
8 Other FAQs	47
8.1 How Do I View the Alarm Rules Configured for a Function?	47
8.2 Does FunctionGraph Support ZIP Decompiling During Video Transcoding?	
8.3 Will Resources Created During FunctionGraph 2.0 OBT Be Automatically Released When Th Will Them Be Billed?	
8.4 What Is an App in FunctionGraph?	47
8.5 Do I Need to Pay for Cold Start Time?	47
8.6 Why Am I Seeing a Message Indicating that My Account Was Suspended When Creating a	
8.7 Will the Requests of All My Functions in Different Regions Be Billed?	
9 Migration from FunctionGraph V1 to V2	49
9.1 What Compatibility Issues Exist During the Migration?	
9.2 Why Can't I Print Logs of a Python 2.7 Function After the Execution of reload(sys)?	

General FAQs

1.1 What Is FunctionGraph?

FunctionGraph allows you to run you code without provisioning or managing servers, while ensuring high availability and scalability. All you need to do is upload your code and set execution conditions, and FunctionGraph will take care of the rest. You pay only for what you use and you are not charged when your code is not running.

1.2 Do I Need to Apply for Any Compute, Storage, or Network Services When Using FunctionGraph?

When using FunctionGraph, you do not need to apply for or pre-configure any computing, storage, or network services, but need to upload and run code in supported runtimes. FunctionGraph provides and manages underlying compute resources, including server CPUs, memory, and networks. It performs configuration and resource maintenance, code deployment, automatic scaling, load balancing, secure upgrade, and resource monitoring.

1.3 Do I Need to Deploy My Code After Programming?

After programming, you only need to package your code into a ZIP file (Java, Node.js, Python, and Go) or JAR file (Java), and upload the file to FunctionGraph for execution.

When creating a ZIP file, place the handler file under the **root** directory to ensure that your code can be run normally after being decompressed.

If you edit code in Go, zip the compiled file, and ensure that the name of the dynamic library file is consistent with the plugin name of the handler. For example, if the name of the dynamic library file is **testplugin.so**, set the handler to **testplugin.Handler**.

1.4 How Do I Obtain a Token?

You can use a token for authentication when calling APIs. To obtain a token, use the standard API of Identity and Access Management (IAM).

```
Run the following command to obtain the token in the CN South-
Guangzhou region:
curl -k -i -X POST https://iam.cn-south-1.myhuaweicloud.com/v3/auth/tokens -H
'Content-Type: application/json' -d '{
  "auth": {
   "identity": {
    "methods": [
      "password"
    ],
    "password": {
      "user": {
       "name": "Huawei Cloud account",
       "password": "Login password",
       "domain": {
       "name": "Huawei Cloud account",
      }
     }
    }
   },
   "scope": {
    "project": {
     "name": "cn-south-1"
    }
  }
}
}'
```

• Run the following command to obtain the token in the **CN North-Beijing1** region:

```
curl -k -i -X POST https://iam.cn-north-1.myhuaweicloud.com/v3/auth/tokens -H
'Content-Type: application/json' -d '{
  "auth": {
   "identity": {
    "methods": [
      "password"
    ],
     "password": {
      "user": {
       "name": "Huawei Cloud account",
       "password": "Login password",
       "domain": {
       "name": "Huawei Cloud account",
       }
      }
    }
   },
   "scope": {
    "project": {
      "name": "cn-north-1"
    }
   }
}
}'
```

NOTE

The value of **X-Subject-Token** in the response header is the token. A token obtained in one region can only be used to call FunctionGraph in this region. For details, see **Obtaining a User Token**.

1.5 What Runtimes Does FunctionGraph Support?

 Table 1-1 lists the runtimes supported by FunctionGraph.

For details, see the runtime versions displayed on the console.

 Table 1-1
 Supported runtimes

Runtime	Version	Development Instructions
Node.js	6.10, 8.10, 10.16, 12.13, 14.18, 16.17, 18.15, 20.15	For details about the function syntax, SDK APIs, and function development, see Developing Functions in Node.js .
Python	2.7, 3.6, 3.9, 3.10, 3.12	For details about the function syntax, SDK APIs, and function development, see Developing an Event Function .
Java	8, 11, 17, 21 (only available in ME- Riyadh and TR-Istanbul)	For details about the function syntax, SDK APIs, and function development, see Developing Functions in Java .
Go	1.x	For details about the function syntax, SDK APIs, and function development, see Developing an Event Function .
C#	.NET Core 2.1, .NET Core 3.1, .NET Core 6.0, .NET Core 8.0 (only in ME-Riyadh and TR-Istanbul)	For details about C# function APIs, SDK APIs, and function development, see Developing an Event Function.

Runtime	Version	Development Instructions
РНР	7.3, 8.3	For details about the function syntax, SDK APIs, and function development, see Developing an Event Function .
Custom	-	-
Cangjie	1.0	-

1.6 How Much Disk Space Is Allocated to Each FunctionGraph Function?

Each FunctionGraph function is allocated 512 MB ephemeral disk space. You can upload deployment packages up to 10 GB in size. For more information, see **Notes and Constraints**.

1.7 Does FunctionGraph Support Function Versioning?

Yes. For details, see Managing Versions.

1.8 How Does a Function Read or Write Files?

Background

A function can read files in the code directory. The working directory of a function is the upper-level directory of the handler file. Assume that you have uploaded a folder named **backend**. To read its **test.conf** file in the same level of directory as the handler file, use relative path **code/backend/test.conf** or use a full path (that is, the value of the **RUNTIME_CODE_ROOT** environment variable). To write a file (for example, to create or download a file), go to the **/tmp** directory or use the file system mounting feature provided by FunctionGraph.

NOTE

- If containers are reclaimed, file read/written content will become invalid.
- Currently, FunctionGraph does not support instance persistence.

Typical Scenarios

- Download files stored in Object Storage Service (OBS) to the **/tmp** directory for processing.
- To store function execution data in OBS, create a file in the **/tmp** directory, write the data into the file, and then upload the file to OBS.

1.9 How Do I Set a Proxy When Using CLI?

Question

When using CLI to upload a ZIP code package, how do I set a proxy server and identity information to complete authentication through the proxy gateway on the internal network?

Answer

Run the following command to set a proxy:

export HTTP_PROXY="http://user:password@proxyIp:proxyPort"

For more information, see https://www.cyberciti.biz/faq/unix-linux-export-variablehttp_proxy-with-special-characters/.

1.10 Does FunctionGraph Support Function Extension?

FunctionGraph has integrated non-standard libraries such as redis, http, and obs_client. You can directly use these libraries when developing functions. For more information, see **Developer Guide**.

Alternatively, use your own dependencies. For more information, see **Dependency Management**.

1.11 Which Permissions Are Required for an IAM User to Use FunctionGraph?

If you are prompted insufficient permissions when creating, deleting, modifying, or querying functions and triggers in FunctionGraph as an IAM user, contact the administrator to grant permissions to your user group. If you want to invoke other cloud services, such as OBS, configure an agency with the required permissions. For security purpose, do this by following the principle of least privilege. For details, see **Permissions Management**.

1.12 How Can I Create an ODBC Drive-based Python Dependency Package for Database Query?

For OS-dependent packages (for example, unixODBC), download the source code to compile dependency packages.

 Log in to your ECS on the ECS console (ensure that the GCC and Make tools have been installed), and run the following command to download the source code package: wget source code path

If you downloaded a **.zip** file, run the following command to decompress it: unzip xxx/xx.zip

If you downloaded a **tar.gz** file, run the following command to decompress it: tar -zxvf xxx/xx.tar.gz

- 2. Run the following command to create the **/opt/function/code** directory: mkdir /opt/function/code
- 3. Go to the destination directory and run the following command: ./configure --prefix=/opt/function/code --sysconfdir=/opt/function/code;make;make install
- Go to /opt/function/code/lib/pkgconfig and check whether the prefix directory is /opt/function/code. cd /opt/function/code/lib/pkgconfig
- 5. Copy all files in **/opt/function/code/lib** to **/opt/function/code**. cp -r /opt/function/code/lib/* /opt/function/code
- Switch to /opt/function/code and compress all files in it to a .zip package. cd /opt/function/code zip -r xxx.zip *

1.13 What Is the Quota of FunctionGraph?

For details about the resource quota of FunctionGraph, see **Notes and Constraints**. For details about how to increase the quota, see **How Do I Apply for a Higher Quota**?

1.14 What Chinese Fonts Does FunctionGraph Support?

FunctionGraph supports the following Chinese fonts:

- NotoSansTC-Regular.otf
- NotoSerifTC-Regular.otf
- NotoSansSC-Regular.otf
- NotoSerifSC-Regular.otf

1.15 How Does FunctionGraph Implement Domain Name Resolution?

FunctionGraph cannot directly resolve private Huawei Cloud DNS domain names. To resolve them, call DNS APIs and perform the following steps.

Resolving a Private DNS Domain Name with an Event Function

Ensure that a VPC and private DNS domain name have been created before performing the following steps:

1. Associate a VPC with the private domain name and add record sets.

Log in to the DNS console and associate a VPC with the private domain name.

Figure 1-1 Associating a VPC with the private domain name

Domain Name Service	Private Zones 🕚										Coste Private Zane
Overview	Private zones you can still create: 33										
Public Zones	Created by Me Shared with Me										
Private Zones	Deete Date Date Date										
PTR Records											
Custom Lines	 Search or lifer by domain name. 										00
Domain Registration 🕑	Domain Name 🖯 Status	Associated VPCs	Record Sets Enterp	ise Project Tag	Enal	TTL (4)	Created ()	Last Modified @	Description	Operation	
Easte P 🖸	🔹 a magel (page parkagen a 🖉 Marmal	vpc-default (192	2 cetaut		Technologies (Mar 10, 2824 09 27 28	Mar 18, 2024 09:27:29	participation.	Manage Record Sata Associate VPC	Disable More -

Click the domain name, and add a type A record set.

Figure 1-2 Adding a record set

< n=_=	n v			
Record Sets	Export and Import	Tags		
		cord sets in public and private zones. T ne DNS server addresses used by the	ry now subnets in the associated VPCs where the ECSs re	side are 10
Add Re	ecord Set Delete	Enable Disable		
Q Searc	ch or filter by domain name.			
D	oomain Name \ominus	Status	Type \ominus	
n		🕑 Normal	NS	
n		< Normal	SOA	
a	a m	📀 Normal	A	

2. Create a function.

Create a function whose runtime is Python 2.7. The following is sample code.

-*- coding:utf-8 -*-
import json
import os
def handler(event, context):
os.system("curl -iv www.test.com")

3. Configure an agency with DNS and VPC permissions for the function.

Log in to the **IAM console**, and configure an agency with the **DNS ReadOnlyAccess** and **VPC Administrator** permissions for FunctionGraph. For details, see **Configuring Agency Permissions**.

Figure 1-3 Creating an agency with DNS and VPC permissions

Author	ze Agency					
1 teles	newspace (2) Seed Source (3) Texa					
Assign sele	cled permissions to by lest.				Create	te Policy
0 Sei	ded permissions: 2, which include the dependency permissions of VPC Administrator. Click View Selected or expand the details area to view the dependency permissions.					
View 8	Acted (2) Crew Permissions from Another Project		All policies/hales	~ All senices	v] [Petty Me v] [Enter a policy name, sole n	
	Polcy/Sole Name	Type				
•	(AB Read-Day-locors Raad-only permission, which only allow users to query CNG resources.	System-defined policy				
•	WC Adventualer WC Adventualer	Bystem-defined sole				

D NOTE

You need to configure the permission to read DNS resource data because the function needs to obtain such data when resolving a domain name. Otherwise, the following error message is displayed, indicating that the DNS resource data failed to be obtained.

2020/08/20 10:37:12 GMT+08:00 Start invoke request 'a2f105b4-2e72-4fda-94a5-86d3837e961d', version: latest **[GET /v2/zones/{zone_id}/recordsets] failed, response: {"code":"DNS.1802","message":"Policy doesn't allow dns:recordset:list to be performed."}** 2020/08/20 10:37:13 GMT+08:00 Finish invoke request 'a2f105b4-2e72-4fda-94a5-86d3837e961d', duration: 1030.072ms, billing duration: 1100ms, memory used: 77.039MB.

4. Configure the function.

On the details page of the function created in **step 2**, click the **Configuration** tab and configure the following settings:

- a. For **Permissions**, select the agency created in **step 3**.
- b. Enable VPC access and select the created VPC, subnet, and domain name. For details, see Figure 1-4.

Figure 1-4 Configuring the function

Code Monitoring	Version	Aliases	Configuration
Basic Settings		Network	
Triggers Permissions		bandwidth	ess is enabled by default. The default NIC accesses the public network with shared bandwidth. This access mode is to it. /PC Access uses the NIC bound to the VPC instead of the default NIC. The VPC determines whether public access
Network Disk Mounting		Public Access	If Public Access is disabled, the function cannot access public networks via the default NIC of Fur
Environment Variables Function URL Concurrency		VPC Access	
Configure Async Notificat	ion	VPC	vpc
Tags		Subnet	subnet Create Subnet C
Lifecycle Advanced Settings		Domain Name	dnexxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
		VPC CIDR Block	Use semicolons (;) to separate CIDR blocks. Example: 1 Enter the VPC CIDR block used in the code to check whether it conflicts with FunctionGraph's VF
		Invocation Only by	/ Specific VPC

5. Check the execution result.

All configured IPv4 domain names can be resolved.

NOTE

Changes to the IP addresses corresponding to the VPC domain names you configure will take effect in 10 minutes.

Resolving a Private DNS Domain Name with a Container Image-based Function

1. Obtain a private domain name and zone ID.

This procedure uses a domain name with a record set as an example.

- a. Log in to the DNS console.
- b. Obtain a zone ID.

Click , and select **Domain Name** in the search box to obtain a zone ID.

- c. Obtain the private domain name corresponding to a recording set.
 Click the domain name to go to the record set list, and select a record set.
- 2. Compile the resolution logic.

Use API Explorer to debug the API used to query record sets in a zone.

- Set zone_id to the zone ID obtained in the preceding step, and click
 Debug. The IP address of the private domain name is displayed in the response body.
- Switch to the **Sample Code** tab to obtain the complete code. For details about the dependencies, click **View SDK Details**.

1.16 How Do I Use a Domain Name to Access an API Registered with API Gateway (Dedicated)?

The domain name **www.test.com** is used as an example. The procedure is as follows:

- **Step 1** Log in to the API Gateway console, choose **Dedicated Gateways** in the navigation pane, and click the target gateway name. On the **Gateway Information** page, view **EIP** in the **Inbound Access** area to obtain the IP address of the API gateway.
- **Step 2** On the DNS console, configure an IPv4 rule for mapping **www.test.com** to an API gateway address.
- **Step 3** Configure domain name resolution by referring to **How Does FunctionGraph Implement Domain Name Resolution?**. In this way, you can access the API registered with the API gateway by using domain name **www.test.com**.

----End

1.17 What Are the Common Application Scenarios of FunctionGraph?

- 1. Web applications: mini programs, web pages/apps, chatbots, and Backends for Frontends (BFF).
- 2. Event-driven applications: file processing, image processing, live video streaming/transcoding, real-time data stream processing, and IoT rule/event processing.
- 3. AI applications: third-party service integration, AI inference, and license plate recognition.

For details, see **Application Scenarios**.

1.18 Why Can't the API Gateway Domain Name Bound to a Service Be Resolved During Function Invocation?

Currently, FunctionGraph resolves only Huawei Cloud DNS domain names and POD domain names.

1.19 Does FunctionGraph Support Synchronous Transmission at the Maximum Intranet Bandwidth?

Not currently.

1.20 What If the VPC Quota Is Used Up?

A tenant can create up to 4 VPCs. To create more VPCs, submit a service ticket.

1.21 How Can I Print Info, Error, or Warn Logs?

Take Java as an example. You can use **this demo** to print logs.

1.22 Can I Set the Domain Name of an API to My Own Domain Name?

Yes. The procedure is as follows:

- **Step 1** Log in to the APIG console and bind a domain name by referring to **Binding a Domain Name**.
- Step 2On the Domain Names tab page of the created API group, click Bind
Independent Domain Name. For example, set xxxx.apig.x to test.com/user/get.

----End

1.23 Can I Change the Runtime?

No. Once a function is created, its runtime cannot be changed.

1.24 Can I Change a Function's Name?

No. A function's name cannot be changed once the function is created.

1.25 Why Is Message "failed to mount exist system path" Displayed?

When you see this message, mount the file to a new path.

User ID/user group ID: Can be any number except 1000. The value **-1** will be automatically converted to **1003**. The two IDs control the directory permissions for accessing a remote file system.

File system/ECS name: Name of the file system or ECS to create. Ensure that you have specified a VPC and agency that you have been authorized to access.

Shared directory: To configure a remote shared directory for the mounted ECS, see **Creating an NFS Shared Directory on an ECS**.

Access path: Location where the file system is to be mounted in the function. Set a new two-level directory that starts with **/mnt**. For example, **/mnt/test**.

1.26 How Do I Obtain Uploaded Files?

Take Python as an example. If you use **os.getcwd()** to query the current directory, the directory will be **/opt/function**. However, code has actually been uploaded to **/opt/function/code**.

You can use either of the following methods to obtain uploaded files:

- 1. Run the **cd** command to switch to **/opt/function/code**.
- 2. Access the full path (value of the **RUNTIME_CODE_ROOT** environment variable).

NOTE

You can obtain uploaded files by referring to the preceding methods when other languages are used.

1.27 Why Can't I Receive Responses for Synchronous Invocation?

If the E2E function execution latency exceeds 90s, asynchronous invocation is recommended. If synchronous invocation is used, no responses can be received after 90s due to gateway restrictions.

1.28 What Should I Do If the os.system("command &") Execution Logs Are Not Collected?

Do not use **os.system("command &")**. The background command output will not be collected. To obtain the command output, use **subprocess.Popen** instead.

04 FAQs

1.29 Which Directories Can Be Accessed When a Custom Runtime Is Used?

By default, only the **/tmp** directory can be accessed, for example, for creating or downloading files.

1.30 Which Minor Versions of Python 3.6 and 3.9 Are Supported?

3.6.8 and 3.9.2.

1.31 Which Actions Can Be Used Instead of a VPC Administrator Agency for VPC Access?

The actions listed in **Table 1-2** can be used.

Table 1-2 Actions

Permission	Action
Deleting a port	vpc:ports:delete
Querying a port	vpc:ports:get
Creating a port	vpc:ports:create
Querying a VPC	vpc:vpcs:get
Querying a subnet	vpc:subnets:get

1.32 What Are the Possible Causes for Function Timeout?

- The code logic timed out. In this case, optimize the code or increase the timeout.
- The network timed out. To fix this issue, increase the timeout.
- It took a long time to load Java classes during cold start. In this case, increase the timeout or memory.

1.33 How Do I Obtain the Code of a Function?

- 1. Log in to the FunctionGraph console, and click the name of the target function to go to the details page. Choose **Operation** > **Export function** in the upper right, and click **Export Code**.
- 2. Alternatively, call the function export API.

1.34 Do You Have Sample Code for Initializers?

Yes. See the following examples:

- Node.js (Initializer introduction) exports.initializer = function(context, callback) { callback(null, "); };
- Python (Initializer introduction) def my_initializer(context): print("hello world!")
- Java (Initializer introduction)
 public void my_initializer(Context context)
 {
 RuntimeLogger log = context.getLogger();
 log.log(String.format("ak:%s", context.getAccessKey()));
 }
- PHP (Initializer introduction)
 <?php
 Function my_initializer(\$context) {
 echo 'hello world' . PHP_EOL;
 }
 ?>

1.35 How Do I Enable Structured Log Query?

Scenario

To check the status of asynchronous invocation requests, view the records by choosing **Configuration** > **Configure Async Notification** on the function details page, as shown in **Figure 1-5**.

Figure 1-5 Async	ronous invocation records
------------------	---------------------------

Code Monitoring Versio	on Aliases Configuration
Basic Settings	Configure Async Notification
Trippers	1. Set an agency that allows: Function/sight to access your target service. 2. To avoid cyclic invocation, do not set two functions as asynchronous execution targets of each other
Network	Asynchronous Notification Policy & Edit
Disk Mounting Environment Variables	
Function URL	Asynchronous notification not enabled yet.
Concurrency Configure Async Notification	You can configure notifications for asynchronous functions and functions that use KAPKA, GAUSSMONGO, TIMER, SMM, OBS, CTS, DIS, LTS triggers.
Logs	Asynchronous Invocation Records
Lifecycle	To view invocation records, enable asynchronous invocation status persistence first.
Advanced Settings	

Prerequisites

You have enabled asynchronous invocation status persistence.

Procedure

- **Step 1** Contact customer service to add your account to the whitelist of this feature.
- **Step 2** On the **Configure Async Notification** page, click **Enable LTS**, as shown in **Figure 1-6**.

Endigies and set of the set of the

Step 3 Click **Edit** next to **Asynchronous Notification Policy**, and enable **Asynchronous Invocation Status Persistence**, as shown in and **Figure 1-8Figure 1-7**.

Figure 1-7 Configuring asynchronous notification policy

Code Monitoring Versio	In Aliases Configuration
Basic Settings	Configure Async Notification
Triggers Permissions	1. Set an agency that allow Function/draph to access your target service. 2. To avoid cyclic invocation, do not set two functions as asynchronous execution targets of each other.
Network	Asynchronous Notification Policy 🖉 Edit
Disk Mounting	
Environment Variables	
Function URL	Asynchronous notification not enabled yet.
Concurrency	You can configure notifications for asynchronous functions and functions that use KAFKA, GAUSSMONGO, TIMER, SMN, OBS, CTS, DIS, LTS triggers.
Configure Async Notification	


Figure 1-8 Enabling asynchronous invocation status persistence

Asynchronous Notification Polic	y .
Max. Retries	- 3 + Value Range: 0-3
	Maximum number of retries when asynchronous invocation fails.
Max. Validity Period (s)	- 3,600 + Value Range: 1-86,400
	Maximum lifetime of a message in seconds.
Asynchronous Invocation Status Persistence	
	When enabled, you can query the execution status of each asynchronous call and configure log group and log stream.
	Ensure that you have configured log structuring on the LTS console.

Step 4 Configure structured query on the LTS console.

 On the function details page, view the log group and log stream. Press F12, choose Network, enter filter async-status-log-detail, and obtain the log group ID and log stream ID, as shown in Figure 1-9.

Figure 1-9 Obtaining log group ID and log stream ID

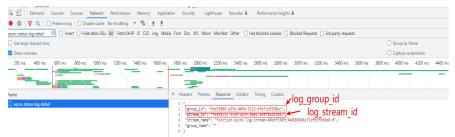

2. On the LTS console, locate the log group and log stream by their IDs, as shown in **Figure 1-10**.

Figure 1-10 Viewing log stream

 function-async-log-group-46b6/338ic3446b8846c71db1fbd9e8 	Modify Delete More +		
Create Log Stream			Q. Click here to choose a filter condition
Log Stream Name	Remark	Tags	Metric Filters Operation
function-async-log-stream-46b6f338fc3445b8846c71db1fbd9e8-0			- 2 🛛 🕁 🗇 🗇 🗇

Figure 1-11 Viewing log stream

Log Groups			
Create Log Group Q Click here to choose a filter condition			C d
Log Group Name	Remark	Enterprise P Log Streams Tags	Operation
k8s-log-70ce02d		- 2	Modify Delete Details
Click Create Log Stream Q Click her to choose a filter condition			All Enterprise Pr >
Log Stream Name 📕 Remark	Enterprise P Tags	Metric Filters Billing	Operation
event-70c	default		2 🌣 🔻 🕁 💬
stdout-7	default		2 🌣 🔻 🕁 📼

3. On the log stream details page, click the gear icon in the upper right, as shown in **Figure 1-12**.

Figure 1-12 Clicking the gear icon

< k8s-log-70ce02da-af56-f1ee-ad2b-0255ac1002c8 >							
Log Stream Favorited Quick Search	< event-70ce02da-af56-11ee-ad2b-0255ac1002c8 0	> ••					
Q Enter a log stream name. 🕒	⊜ event-70ce02da-af56-11ee-ad2b-0255… ☆	③ △ 2					
event-70ce02da-at56-11ee-ad2	Q. Enter a keyword in the log. Exact or fuzzy search by keyword. Example: "error", "erfor", "error", "eror", "error", "error", "error", "error", "e	🔿 🖽 📮 🛛 Search					
stdout-70ce02da-af56-11ee-ad2	Solout-Ziook00a-at56-11ee-ad2.						

4. Configure log structuring, as shown in Figure 1-13.

Figure 1-13 Configuring log structuring

Settings (eve

Log Ingestion Index Settin	gs Cloud St	tructuring Parsing	og Cleaning Alarm Ru	les		
						eam support different structuring parsing rules. Cloud structuring parsing consumes the computing power lerent structuring parsing modes, see Details.
Log data can be divided into struct database. The data structure is irre						nd format. Unstructured data refers to data that is not convenient to be represented by two-dimensional logical tables of the
Auto Configuration and Analysis (You can choose one of the fol			onfiguring indexes and quick a	inalysis.		
Regular Expressions	JSON (such as spaces	xiyiz Delimiter	NG:UX Ngitx Str	acturing Template		
Step 1 Select a sample log e	vent.					
×(>(0)0(0(×						
Select from existing log even Step 2 Specify a delimiter.	5					
Space Tab	1.1		Invisible Characters	Custom characters	Custom character string	
Step 3 Extract fields.						
Intelligent Extraction						
Content Fields Tag Fi	elds (?)					
Field	Source	Туре	Example Value			Operation

5. Click Intelligent Extraction, as shown in Figure 1-14.

Figure 1-14 Intelligent Extraction

3	Step 3 Extract fields. Intelligent Extraction Content Fields Tag F				
	Field	Source	Type	Example Value	Operatio
	field1 🖉	Content Fields	string	x	ŵ
	field2 🖉	Content Fields	string	x	÷
	field3 🖉	Content Fields	long	0	Û
	feid4 🖉	Content Fields	long	0	¢
	feld5 🖉	Content Fields	long	0	Û
	fieldő 🖉	Content Fields	string	x	Û

- 6. Click \checkmark to modify the field definition as follows:
 - a. Change **field1** to **function_urn** and its type to **string**.
 - b. Change **field2** to **request_id** and its type to **string**.
 - c. Change **field3** to **seq_status** and its type to **long**.
 - d. Change field4 to operation_timestamp and its type to long.
 - e. Change field5 to error_code and its type to long.
 - f. Change field6 to error_message and its type to string.

Enable Quick Analysis, as shown in Figure 1-15.

Figure 1-15 Enabling quick analysis



7. Click Save. Figure 1-16 shows the configuration.

Figure 1-16 Saved configuration

Con val hannon menu una con una con anno anno anno anno anno.								
Log Ingestion I	og Ingestion Index Settings Cloud Structuring Parsing Log Cileaning Alarm Rules							
	ICAgent structuring parsing is recommended. Combined parsing based on plug-ins is supported. Multiple collection configurations of a single log stream sugport different structuring parsing rules. Cloud structuring parsing consumes the computing power of the LTS server. In the future, log processing staffic will be charged based on the size of raw logs. For details about the application scenarios of different structuring parsing modes, see Details.							
	s rule for structuring logs will also delete log cleaning rule to set field search and quick analysis for a structured field							
Parameters				2				
Method	Delimiter							
ample Log Event	×(×(0)0)0)×							
Extracted Fields	Content Fields Tag Fields (2)							
	Field	Source	Тура	Example Value				
	function_um	Content Fields	string	×				
	request_id	Content Fields	string	x				
	seq_status	Content Fields	long	0				
	operation_timestamp	Content Fields	long	0				
	error_code	Content Fields	long	0				
	error_message	Content Fields	string	x				

----End

1.36 Can I Enable a Listening Port in a Function to Receive External TCP Requests via EIP?

No. FunctionGraph does not support this feature currently. Functions are about serverless computing, and compute resources are allocated while functions are running. Customizing a listening port is not suitable.

1.37 Does FunctionGraph Support Domain Name Resolution?

No.

To configure custom domain names registered on Domain Name Service (DNS), first convert them to IP addresses in your function.

Call the DNS API to resolve domain name IP addresses, and use these IP addresses to access the corresponding services.

1.38 How Do I Obtain the Source IP Address of an HTTP Request Initiated by a Function?

Public Access

• VPC Access disabled for the function

The SNAT address of FunctionGraph is used to access the public network. It is **fixed**. To obtain it, contact technical support.

Figure 1-17 VPC access disabled



• VPC Access enabled for the function (For details about the VPC configuration, see Configuring Networks)

Figure 1-18 VPC access enabled

Code Monitoring Versi	ion Aliases Configuration
Basic Settings	Network
Triggers Permissions	Addr. Access is antibility default. Not access the public relation with shared landwidth. This access rate is sublice for hear requests. For high bandwidth, serformance, and neisbility, matter VPC Access, and a public NVT politivity, and land an EP with without landwidth and Ending VPC-Access on performance. Addr. Access is a sublice for the politic access is a sublice.
Network Disk Mounting	Pułk Acess
Environment Variables	VPC Access
Concurrency Configure Async Notification	VPC (vpc.ker.107960000000000) V G (reals VPC (?) Security whether to adverte the factor to accurate reaction as addressed in a security VPC 11VPC accurs to evalued, full takes a lend the traction at the fact times at the bit t
Logs	Sponty whether is above the function in access resources (such as establishes) in a specific VPC. If VPC access is enabled, if will take a long time to execute the function at the limit, but the based duration will not be affected. Planc access and V access cannot be enabled at the same time.
Tags Lifecycle	Subret subret http://www.subret.http://www.subre
Advanced Settings	Contain Name Select- Q Create Domain Name () Private domain names of the VPC to involve a DNG/HP to resolve private domain names, you must speedy an agency with the permissione to read DNG resources
	VPC OR Box Use containing to search COR book. Complex Define the VPC COR Box and in the one-to down whith it confids with Fundaminingen VPC COR Box. Nex. 5 COR Boxas.
	Invocate Only by Specific VPC 🛛
	Save

The SNAT address configured in the user VPC is used to access the public network. It is **fixed**. To obtain the public IP address, perform the following steps:

- a. Log in to the NAT Gateway console, click $^{\textcircled{O}}$ in the upper left corner, and select a region.
- In the navigation pane on the left, choose NAT Gateway > Public NAT Gateway. In the list on the right, click the target gateway name.
- c. On the **SNAT Rules** tab, obtain the public IP address in the rule list.

Figure 1-19 Obtaining the public IP address

And Shall Real Copyr +	10 0	Status 🖯	Scenario O	CIDR Block O	EIP O	Description ()	Added (e)	Operation	
	Q: Select a property or enter a keys	word.							a
to allow your servers to access the internet, and an SUAT rule.	Add SNAT Rule Expert ~	0							
	 To allow your servers to access 	s the internet, add an SNAT rule.							

Intra-VPC Access

When **VPC Access** is enabled, functions can access resources in a VPC. (For details about the VPC configuration, see **Configuring Networks**)

The user VPC address mounted in the PAT is used to access resources in the VPC. The address changes dynamically. To view the private IP address, perform the following steps:

- 1. Log in to the VPC console, click $^{\textcircled{O}}$ in the upper left corner, and select a region.
- In the navigation pane on the left, choose Virtual Private Cloud > Network Interfaces. On the displayed page on the right, obtain the private IP address whose name is FunctionGraph-Access-VPC-Port and Type is Extended network interface. For details about elastic network interfaces, see Elastic Network Interface.

Figure 1-20 Obtaining the private IP address

Network Q Console	Network Interfaces 💿	Create Supplementary Network Interface Create Nationalk Interface
Deshboard	Network Interfaces Bupplementary Network Interfaces	
Self-service Troubleshooting NEW	C Buberel ID: 01200000000000000000000000000000000000	0.0
Virtual Private Cloud	Private IP Address 🔶 Neme 🤌 Type 🎍 Network Allached Instance Bound EIP Private Caps	Security Groups () Operation
My VPCs Subrets	10000007 FunctorCraph Access Extended network interface (1000 100000000 bec 0	1 Detach Instance Bind DP More ~
Route Tables		1 Delach Instance Bind EIP More ~
VPC Peering Connections		
Network Interfaces		

NOTE

- When configuring the whitelist or inbound/outbound rules of a security group, ensure that the configured IP address is within the VPC CIDR block. For details about how to create a security group, see **Creating a Security Group**.
- Make sure to test the VPC function to display the **Extended network interface** in the **Type** column.
- The two private IP addresses obtained above are the active and standby addresses. For details, contact technical support.

2 Function Creation FAQs

2.1 Can I Add Threads and Processes in Function Code?

You can create additional threads and processes in your function by using runtime and OS features.

2.2 What Are the Rules for Packaging a Function Project?

In addition to inline code editing, you can create a function by uploading a ZIP or JAR file, or uploading a ZIP file from OBS. For details, see **Packaging Rules** and **Example ZIP Project Packages**.

Packaging Rules

In addition to inline code editing, you can create a function by uploading a local ZIP file or JAR file, or uploading a ZIP file from Object Storage Service (OBS). **Table 2-1** describes the rules for packaging a function project.

_

Runtime	JAR File	ZIP File	ZIP File on OBS
Node.js	Not supported.	 If the function project files are saved under the ~/Code/ directory, select and package all files under this directory to ensure that the function handler is under the root directory after the ZIP file is decompressed. If the function project uses third- party dependencies, package the dependencies into a ZIP file, and import the ZIP file on the function code page. Alternatively, package the third- party dependencies and the function project files together. 	Compress project files into a ZIP file and upload it to an OBS bucket.

 Table 2-1 Function project packaging rules

Runtime	JAR File	ZIP File	ZIP File on OBS
PHP	Not supported.	 If the function project files are saved under the ~/Code/ directory, select and package all files under this directory to ensure that the function handler is under the root directory after the ZIP file is decompressed. If the function project uses thirdparty dependencies, package the dependencies into a ZIP file, and import the ZIP file on the function code page. Alternatively, package the thirdparty dependencies and the function project files together. 	Compress project files into a ZIP file and upload it to an OBS bucket.

Runtime	JAR File	ZIP File	ZIP File on OBS
Python 2.7	Not supported.	 If the function project files are saved under the ~/Code/ directory, select and package all files under this directory to ensure that the function handler is under the root directory after the ZIP file is decompressed. If the function project uses thirdparty dependencies, package the dependencies into a ZIP file, and import the ZIP file on the function code page. Alternatively, package the thirdparty dependencies and the function project files together. 	Compress project files into a ZIP file and upload it to an OBS bucket.

Runtime	JAR File	ZIP File	ZIP File on OBS
Python 3.6	Not supported.	 If the function project files are saved under the <i>~/Code/</i> directory, select and package all files under this directory to ensure that the function handler is under the root directory after the ZIP file is decompressed. If the function project uses third-party dependencies, package the dependencies into a ZIP file, and import the ZIP file on the function code page. Alternatively, package the third-party dependencies and the function project files together. 	Compress project files into a ZIP file and upload it to an OBS bucket.
Java 8	If the function does not reference third- party components, compile only the function project files into a JAR file.	If the function references third-party components, compile the function project files into a JAR file, and compress all third-party components and the function JAR file into a ZIP file.	Compress project files into a ZIP file and upload it to an OBS bucket.

Runtime	JAR File	ZIP File	ZIP File on OBS
Go 1.x	Not supported.	Zip the compiled file and ensure that the name of the binary file is consistent with that of the handler. For example, if the name of the binary file is Handler , set the name of the handler to Handler .	Compress project files into a ZIP file and upload it to an OBS bucket.
C#	Not supported.	Compress project files into a ZIP file. The ZIP file must contain the following files: <i>Project_name</i> .deps.js on, <i>Project_name</i> .dll, <i>Project_name</i> .runtim econfig.json, <i>Project_name</i> .pdb, and HC.Serverless.Functi on.Common.dll.	Compress project files into a ZIP file and upload it to an OBS bucket.
Custom	Not supported.	Compress project files into a ZIP file. The ZIP file must contain a bootstrap file.	Compress project files into a ZIP file and upload it to an OBS bucket.
Cangjie	Not supported.	Zip the compiled file and ensure that the name of the binary file is consistent with that of the handler. For example, if the name of the binary file is libuser_func_test_su ccess.so , set the name of the handler to libuser_func_test_su ccess.so .	Compress project files into a ZIP file and upload it to an OBS bucket.

Example ZIP Project Packages

• Example directory of a Nods.js project package Example.zip Example project package |--- lib Service file directory

node_modules index.js package.json	NPM third-party component directory .js handler file (mandatory) NPM project management file
Example directory of	a PHP project package
Example.zip ext pear index.php	Example project package Extension library directory PHP extension and application repository PHP handler file
Example directory of	a Python project package
Example.zip com PLI index.py watermark.py watermark.png	Example project package Service file directory Third-party dependency PLI directory .py handler file (mandatory) .py file for image watermarking Watermarked image
Example directory of	a Java project package
Example.zip obstest.jar esdk-obs-java-3.20.2 jackson-core-2.10.0.j jackson-databind-2.' log4j-api-2.12.0.jar log4j-core-2.12.0.jar okhttp-3.14.2.jar okio-1.17.2.jar	ar Third-party dependency JAR file
Example directory of Example.zip testplugin.so	a Go project package Example project package Service function package
	a C# project package
Example.zip fssExampleCsharp2.0 fssExampleCsharp2.0 fssExampleCsharp2.0	Example project packageD.deps.jsonFile generated after project compilationD.dllFile generated after project compilationD.pdbFile generated after project compilationD.runtimeconfig.jsonFile generated after project compilationHelp file, which can be directly used
Example directory of	a Cangjie project package
fss_example_cangjie.zip libuser_func_test_suc	Example project package
Custom	
custom	

2.3 How Does FunctionGraph Isolate Code?

Each FunctionGraph function runs in its own environment and has its own resources and file system.

2.4 How Do I Create the Bootstrap File for an HTTP Function?

To create an HTTP function, create a bootstrap file. For details, see **Creating a Bootstrap File**.

3 Trigger Management FAQs

3.1 What Events Can Trigger a FunctionGraph Function?

For details, see Supported Event Sources.

3.2 What If Error Code 500 Is Reported When Functions that Use APIG Triggers Return Strings?

Ensure that the function response for an invocation by API Gateway has been encapsulated and contains **body(String)**, **statusCode(int)**, **headers(Map)**, and **isBase64Encoded(boolean)**.

The following is an example response returned by a Node.js function that uses an APIG trigger:

```
exports.handler = function (event, context, callback) {
    const response = {
        'statusCode': 200,
        'isBase64Encoded': false,
        'headers': {
            "Content-type": "application/json"
        },
        'body': 'Hello, FunctionGraph with APIG',
        }
        callback(null, response);
    }
```

The following is an example response returned by a Java function that uses an APIG trigger:

import java.util.Map;

```
public HttpTriggerResponse index(String event, Context context){
   String body = "<html><title>FunctionStage</title>"
        + "<h1>This is a simple APIG trigger test</h1><br>"
        + "<h2>This is a simple APIG trigger test</h2><br>"
        + "<h3>This is a simple APIG trigger test</h3>"
```

```
+ "</html>";
     int code = 200;
     boolean isBase64 = false;
     Map<String, String> headers = new HashMap<String, String>();
     headers.put("Content-Type", "text/html; charset=utf-8");
     return new HttpTriggerResponse(body, headers, code, isBase64);
  }
class HttpTriggerResponse {
  private String body;
  private Map<String, String> headers;
  private int statusCode;
  private boolean isBase64Encoded;
  public HttpTriggerResponse(String body, Map<String, String> headers, int statusCode,
boolean isBase64Encoded){
     this.body = body;
     this.headers = headers;
     this.statusCode = statusCode;
     this.isBase64Encoded = isBase64Encoded;
  }
}
```

3.3 What Do LATEST and TRIM_HORIZON Mean in DIS Trigger Configuration?

Cursors **LATEST** and **TRIM_HORIZON** specify the start points for reading data in Data Ingestion Service (DIS) streams.

• **TRIM_HORIZON**: Data is read from the earliest valid record stored in the partition.

For example, a tenant used a DIS stream to upload three pieces of data A1, A2, and A3. Assuming that A1 expires but A2 and A3 are still valid after a period of time, if the tenant specifies **TRIM_HORIZON** for downloading data, only A2 and A3 can be downloaded.

• **LATEST**: Data is read from the latest record in the partition. This option ensures that the most recent data in the partition is read. For details, see **Obtaining a Cursor**.

3.4 How Do I Use an APIG Trigger to Invoke a Function?

For details, see Using an APIG (Dedicated) Trigger.

3.5 How Does a Function Obtain the Request Path or Parameters When Using an APIG Trigger?

By default, the request path or parameters are included in **event**. A function invokes APIG using its event template. You can obtain the request path or parameters from the function execution result.

Example:

- queryStringParameters: parameters following the question mark (?), separated with ampersands (&). These parameters are added in the URL of a GET request, and will be transferred in the URL string format when a GET request is initiated.
- path: API URL.

You can call an API using its request path. Example: https:// 464d86ec641d45a683c5919ac57f3823.apig.projectID.huaweicloudapis.com/ apig-demo/subpath

Alternatively, you can call an API by adding request parameters. Example:

https://464d86ec641d45a683c5919ac57f3823.apig.projectID.huaweicloudapis.com/apig-demo**/subpath?a=1&b=2**

3.6 Can I Configure a Kafka Trigger in a Different Subnet from My Function?

No. You can only create a Kafka trigger in the same VPC subnet as your function.

4 Dependency Management FAQs

4.1 What Is a Dependency?

A dependency is a program package and also an environment required for running a software package. The software package relies on and can only run in the environment.

4.2 When Do I Need a Dependency?

When you install a program or develop code that relies on an environment to run, you need to introduce the dependency.

4.3 What Are the Precautions for Using a Dependency?

- The name of each file in a dependency cannot end with a tilde (~).
- There should be no more than 30,000 files in a dependency.
- You can upload a ZIP dependency file within 10 MB on the function details page. For a larger dependency (max. 300 MB), upload it using OBS.
- If your function uses a large private dependency, increase the timeout by choosing **Configuration** > **Basic Settings** on the function details page.

4.4 What Dependencies Does FunctionGraph Support?

Supported Dependencies

FunctionGraph supports standard libraries and third-party dependencies.

• Standard libraries

When using standard libraries, you can import them to your inline code, or package and upload them to FunctionGraph.

• Supported non-standard libraries

FunctionGraph provides built-in third-party components, as described in **Table 4-1** and **Table 4-2**. You can import these components to your inline code in the same way as you import standard libraries.

Name	Description	Version
q	Asynchronous method encapsulation	1.5.1
со	Asynchronous process control	4.6.0
lodash	Common tool and method library	4.17.10
esdk-obs-nodejs	OBS sdk	2.1.5
express	Simplified web-based application development framework	4.16.4
fgs-express	Provides a Node.js application framework for FunctionGraph and APIG to run serverless applications and REST APIs. This component provides an example of using the Express framework to build serverless web applications or services and RESTful APIs.	1.0.1
request	Simplifies HTTP invocation and supports HTTPS and redirection.	2.88.0

 Table 4-1 Third-party components integrated with the Node.js runtime

 Table 4-2 Non-standard libraries supported by the Python runtime

Module	Description	Version
dateutil	Date and time processing	2.6.0
requests	HTTP library	2.7.0
httplib2	httpclient	0.10.3
numpy	Mathematical computation	1.13.1
redis	Redis client	2.10.5

04 FAQs

Module	Description	Version
obsclient	OBS client	-
smnsdk	SMN access (public cloud)	1.0.1

• Other third-party libraries

For other third-party libraries not listed in the preceding tables, package and upload them to an OBS bucket or on the function details page. For details, see **How Do I Create a Dependency on the FunctionGraph Console?** These libraries will then be used in your function code.

4.5 Does FunctionGraph Support Class Libraries?

Yes. FunctionGraph supports both standard libraries and non-standard third-party libraries. For details, see **What Dependencies Does FunctionGraph Support?**

4.6 How Do I Use Third-Party Dependencies on FunctionGraph?

- 1. Package third-party libraries into a ZIP package by referring to dependency creation.
- 2. Create a dependency on the FunctionGraph console by referring to How Do I Create a Dependency on the FunctionGraph Console?
- 3. On the function details page, click the **Code** tab, and add the dependency by referring to **How Do I Add a Dependency to a Function?** Then you can use the dependency in the function code.

4.7 How Do I Create Function Dependencies?

You are advised to create function dependencies in EulerOS. If other OSs are used, an error may occur due to underlying dependent libraries. For example, the dynamic link library cannot be found.

NOTE

If the modules to be installed need dependencies such as .dll, .so, and .a, archive them to a .zip package.

Setting Up the EulerOS Environment

EulerOS is an enterprise-grade Linux OS based on open-source technology. It features high security, scalability, and performance, meeting customers' requirements for IT infrastructure and cloud computing services. **Huawei Cloud EulerOS** is recommended.

 Buy a EulerOS ECS on Huawei Cloud by referring to Purchasing and Logging In to a Linux ECS. On the Configure Basic Settings page, select Public Image, and select Huawei Cloud EulerOS and an image version. 2. Download the EulerOS image, and use virtualization software to set up the EulerOS VM on a local PC.

Creating a Dependency for a Python Function

Ensure that the Python version of the packaging environment is the same as that of the function. For Python 2.7, Python 2.7.12 or later is recommended. For Python 3.6, Python 3.6.3 or later is recommended.

To install the PyMySQL dependency for a Python 2.7 function in the local **/tmp/ pymysql** directory, run the following command:

pip install PyMySQL --root /tmp/pymysql

After the command is successfully executed, go to the /tmp/pymysql directory:

cd /tmp/pymysql/

Go to the **site-packages** directory (generally, **usr/lib64/python2.7/site-packages/**) and then run the following command:

zip -rq pymysql.zip *

The required dependency is generated.

NOTE

To install the local wheel installation package, run the following command: pip install piexif-1.1.0b0-py2.py3-none-any.whl --root /tmp/piexif //Replace **piexif-1.1.0b0-py2.py3-none-any.whl** with the actual installation package name.

Creating a Dependency for a Node.js Function

Ensure that the corresponding Node.js version has been installed in the environment.

To install the MySQL dependency for a Node.js 8.10 function, run the following command:

npm install mysql --save

The **node_modules** folder is generated under the current directory.

Linux OS

Run the following command to generate a ZIP package.

zip -rq mysql-node8.10.zip node_modules

The required dependency is generated.

• Windows OS

Compress node_modules into a ZIP file.

To install multiple dependencies, create a **package.json** file first. For example, enter the following content into the **package.json** file and then run the following command:

```
"name": "test",
"version": "1.0.0",
"dependencies": {
"redis": "~2.8.0".
```

"mysql": "~2.17.1" } npm install --save

NOTE

}

Do not run the CNPM command to generate Node.js dependencies.

Compress node_modules into a ZIP package. This generates a dependency that contains both MySQL and Redis.

For other Node.js versions, you can create dependencies in the way stated above.

Creating a Dependency for a Java Function

When you compile a function using Java, dependencies need to be compiled locally. For details about how to add dependencies, see **Developing Functions in** Java (Using an IDEA Java Project).

Creating a Dependency for a PHP Function

Huawei Cloud EulerOS 2.0 is recommended.

By default, Composer and PHP 7.3 have been installed in the environment. Install Protobuf 3.19 using Composer.

Create the **composer.json** file with the following content:

```
"require": {
      "google/protobuf": "^3.19"
  }
}
```

Run the following command: Composer install

The **vendor** folder is generated with the **autoload.php**, **composer**, and **google** subfolders in the current directory.

Linux

Run the following command to generate a ZIP package. zip –ra vendor.zip vendor

Windows

Compress vendor into a ZIP file.

If multiple dependencies need to be installed, specify them in the composer.ison file, compress the vendor folder into a ZIP file and upload it.

NOTE

To use third-party dependencies downloaded using Composer in PHP project code, load the dependencies through require "./vendor/autoload.php". By default, files decompressed from the uploaded ZIP package are placed in a directory at the same level as the project code.

4.8 How Do I Create a Dependency on the FunctionGraph Console?

- 1. Log in to the FunctionGraph console, and choose **Functions** > **Dependencies** in the navigation pane.
- 2. Click Create Dependency.
- 3. Set the following parameters.

Parameter	Description
Name	Dependency name.
Code Entry Mode	 Upload a ZIP file directly or through OBS. Upload ZIP file: Click Select File to upload a ZIP file. Upload from OBS: Specify an OBS link URL. For details about how to obtain the URL, see Accessing an Object Using Its URL.
Runtime	Select a runtime.
Description	Description of the dependency. This parameter is optional.

Table 4-3 Dependency configuration parameters

- 4. Click **OK**. By default, a new dependency is version **1**.
- 5. Click the dependency name, and view all versions and related information on the displayed page. Each dependency can have multiple versions.
 - To create a dependency version, click **Create Version** in the upper right corner of the page.
 - To view the address of a version, click the version.
 - To delete a version, click the delete icon in the same row.

Figure 4-1 Deleting a dependency version

Version Θ	Version ID ()	Size 🖯	Runtime ()	Last Modified 🖨	Description ()	Operation
1	446600000000000000000000000000000000000	2.69 MB	http	Last year	-	View Details Delete

4.9 How Do I Add a Dependency to a Function?

- 1. On the function details page, click the **Code** tab, and click **Add** in the **Dependencies** area.
 - Public: Public dependencies are provided by FunctionGraph and can be directly added.
 - **Private**: Private dependencies are those you created and uploaded.
- 2. Click OK.

5 Function Execution FAQs

5.1 How Long Does It Take to Execute a FunctionGraph Function?

Within 900s for synchronous execution and 72 hours for asynchronous execution.

The default execution timeout is 3s. You can set the timeout (unit: s) to an integer from 3 to 259,200. If you set the timeout of a function to 3s, it will be terminated after 3s.

5.2 Which Steps Are Included in Function Execution?

Function execution includes two steps:

- 1. Select an idle instance with required memory.
- 2. Run specified code.

5.3 How Does FunctionGraph Process Concurrent Requests?

FunctionGraph automatically scales in or out function instances based on the number of requests. If the number of concurrent requests increases, FunctionGraph allocates more function instances to process the requests. If that number decreases, FunctionGraph allocates fewer function instances accordingly.

Number of function instances = Function concurrency/Concurrency per instance

- Function concurrency: the number of requests concurrently executed by a function at a certain time point.
- Concurrency per instance: the maximum number of concurrent requests allowed by a single instance. This is equivalent to the **Max. Requests per Instance** parameter on the **Concurrency** page.

D NOTE

For details about related services that may be involved in concurrent requests, see **Supported Event Sources**.

5.4 What If Function Instances Have Not Been Executed for a Long Time?

If a function has not been executed for a period of time, all instances related to the function will be released.

5.5 How Can I Speed Up Initial Access to a Function?

C# and Go support a lower startup speed than other languages due to mechanism issues. You can use the following methods to speed up initial access to a function:

- Allocate more memory to the function.
- Simplify function code, for example, delete unnecessary dependency packages.
- When using C# in non-concurrent scenarios, you can also:

Create a one-minute timer trigger to ensure that there is at least one active instance.

5.6 How Do I Know the Actual Memory Used for Function Execution?

The returned information about a function contains the maximum memory consumed. For more information, see **SDK APIs** in the *FunctionGraph Developer Guide*. Alternatively, check the memory usage in the execution result.

5.7 Why Is My First Request Slow?

Functions are cold-started. If initialization or a lengthy operation is performed during the first function execution, the first request will be delayed. However, subsequent requests before container deletion will be faster. If there is no request within one minute, the container will be deleted.

5.8 What Do I Do If an Error Occurs When Calling an API?

Rectify the fault by referring to **Error Codes**. If the fault persists, contact technical support.

5.9 How Do I Read the Request Header of a Function?

The first parameter in the function handler contains the request header. You can print the function execution result to obtain required fields.

As shown in the following figure, **event** is the first parameter in the function handler, and **headers** is the request header.



5.10 Can the Synchronous Execution Interface Be Invoked on a Private Network?

Yes, the interface is invoked on a private network by default. For cross-region invocation, enable public network access.

5.11 How Do I Check the Memory Usage When Seeing "runtime memory limit exceeded"?

Check the used memory in the response.

Figure 5-1 Checking the used memory

index.py	×	Execution Result ×
6	<pre># event['max'] = context.getUserData('size')</pre>	
7	mem =	S Execution failed
8		Function Output
9	if get_memory_used() >= int(context.getUser(runtime memory limit exceeded
10	event['mem_size'] = get_memory_used() /	View Details
11	break	
12	mem += '1' * 1024000	Log Output
13	time.sleep(0.001)	2022-07-21T07:10:22Z Start invoke request '696ca9a9-22d9-4602-a354-decf8c99aac
14	time.sleep(1)	version: latest
15	return {	2022-07-21T07:10:23Z Finish invoke request '696ca9a9-22d9-4602-a354-
16	"statusCode": 200,	decf8c99aac3'(invoke Failed:RuntimeMemoryExceedLimit), duration: 1266.043ms, billi
17	"isBase64Encoded": False.	duration: 1267ms, memory used: 510.953MB, billing memory: 512MB

5.12 How Do I Troubleshoot "CrashLoopBackOff"?

The message "CrashLoopBackOff: The application inside the container keeps crashing" is displayed when a custom image execution failure occurs. In this case, perform the following operations:

04 FAQs

1. Analyze the causes.

Figure 5-2 Viewing the execution result

function invocation exception, error: CrashLoopBackOff: The application inside the container keeps crashing: Traceback (most recent call last): File "app.py", line 1, in <module> from flask import Flask, request, g ModuleNotFoundError: No module named 'flask'

- 2. Verify the container image by referring to **Deploying a Function Using a Container Image**.
- 3. Check whether the image uses the Linux x86 architecture. Currently, only Linux x86 images are supported.

5.13 After I Updated an Image with the Same Name, Reserved Instances Still Use the Old Image. What Can I Do?

Use a non-latest tag to manage image updates, and do not use the same image name.

6 Function Configuration FAQs

6.1 Can I Set Environment Variables When Creating Functions?

Yes. Set variables to dynamically pass settings to your function code and libraries without changing your code. For more information, see **Configuring Environment Variables**.

6.2 Can I Enter Sensitive Information in Environment Variables?

FunctionGraph displays all the information you enter in plain text. Therefore, do not enter insensitive information such as passwords when you define environment variables.

6.3 How Do I Use a Function to Invoke a Subfunction?

For details, see the example Using a Function to Invoke a Subfunction.

6.4 How Do I Use the Versions and Aliases of an HTTP Function with an APIG Trigger for Gray Upgrade?

1. Create versions V1 and V2 based on **latest**, create an alias named **alias** for V1 with a 100% weight, and create an APIG trigger for **alias**.

Figure 6-1 Publishing versions V1 and V2

Code	Monitoring Version Allases Con	figuration			
Vers	ion (2/19)				
	ublish New Version Delete				
	Select a property or enter a keyword.				
	Version 0	Allases 0	Description ()	Last Modified \ominus	Operation
) V2	-		1 mintue apo	Delete
) v i	-	-	2 mintues apo	Delete

Figure 6-2 Creating alias and binding V1 to it

	Configuration			
Allas (1/10)				
Create Alias Dolete				
Q. Belect a property or enter a keyword.				(Q)
□ Name ⊖	Wersion (e)	Description ()	Modified 0	Operation
allas	latest (Weight: 0.%) V1 (Weight: 100.%)	-	2 mintues ago	Edit Delote

Figure 6-3 Creating a trigger for alias

< test-py39 Aliases: alias	•				
Function Info					
	C	+ Create Trigger	FunctionGraph v2	Configure Asyr • Success Notification • Failure Notification	ion: Disabled
Code Monitoring Configu	ration				
Basic Settings	Triggers Total: 1				
Triggers	1 The total number of LTS, G	AUSSMONGO, DIS, OPENS	SOURCEKAFKA, RABBITMO, RO	CKETMQ, TIMER, DMS, KAFK	A triggers cannot exc
Permissions	API Gateway (APIG) (Subtotal	: 1)			
Disk Mounting Concurrency Advanced Settings	Created: API_testapig	V1 Enabled 24 16:11:16 GMT+08:00			Delete
-	URL https://c72240			888888889y39 🗇	
	API Group: APIGroup_workflow	Environme RELEASE		Security Authentication: NONE	
	Method: ANY	Path: /test-py39		Timeout: 5,000 ms	

D NOTE

You can create APIG triggers for a function alias or version. By default, a trigger name is **API_**{*Function name*}{*Version*}, and the request path is *\{Function name*}-{*Version*}.

An APIG trigger URL will only be used either for an alias or its matched version. For example, assume that V1 has been bound to **alias**. If you create a trigger with the default name **API_testapigV1** for V1 and then create another trigger with the same name and URL for **alias**, the **API_testapigV1** trigger will not be displayed in the trigger list of V1.

2. Go back to the **Aliases** tab page of **latest**, click **Edit** in the row of **alias**, and set **Additional Version** to **V2** with a custom weight. This is for gray upgrade from V1 to V2.

NOTE

Weights indicate the percentage of received data that will be allocated to corresponding versions. You can set a weight that meets your service requirements.

3	5
Edit Alias	
Alias	alias
* Version	V1 (aliases: 1)
Teeffe Ohifiine	
Traffic Shifting	
* Additional Version	V2 (aliases: 0)
Shift By	Percentage Rule
	You can forward a specified percentage of requests or requests with specified headers to the additional version.
_	Tou can forward a specifical percentage of requests of requests with specified frequency to the additional version.
★ Weight	
× weight	
	Percentage of requests to be forwarded to the additional version. For example, if you set the percentage to 5%, FunctionGraph will
	forward 5% of requests to the additional version and the remaining to the main version.
Description	Enter a description.
	0/512 2

Figure 6-4 Editing an alias

3. Create version V3, click **Edit** in the row of **alias** on the **Aliases** tab page, and change **Version** to **V2** and **Additional Version** to **V3** with a custom weight. This is for gray upgrade from V2 to V3.

Figure 6-5 Creating V3

	Code Monitoring Version	Aliases Configuration			
,	Version (3/19) Publish New Version Delvice				
	Q. Select a property or enter a keyword				Q 0
	Version O	Allases ()	Description 😣	Last Modified 😣	Operation
	🗆 V3	-	-	1 mintue ago	Delete
	v2	-	-	5 mintues ago	Delete
	. vi	alias		9 mintues ago	Deixte

Edit Alias	
Alias	alias
* Version	V2 (aliases: 0)
Traffic Shifting	
* Additional Version	V3 (aliases: 0) V3
Shift By	Percentage Rule
	You can forward a specified percentage of requests or requests with specified headers to the additional version.
* Weight	- 90 + %
	Percentage of requests to be forwarded to the additional version. For example, if you set the percentage to 5%, FunctionGraph will forward 5% of requests to the additional version and the remaining to the main version.
Description	Enter a description.
	0/512 /

Figure 6-6 Editing an alias

NOTICE

After publishing a version based on **latest**, you can publish more versions only after making a configuration or code change on the function.

Aliases bound with triggers cannot be deleted.


T External Resource Access FAQs

7.1 How Does a Function Access the MySQL Database?

Perform the following operations:

- 1. Check whether the MySQL database is deployed in a VPC.
 - Yes: Configure the same VPC and subnet as the MySQL database for the function by referring to Configuring VPC Access.
 - No: See How Do I Configure External Network Access?
- Search for MySQL templates and select the one with the desired runtime, as shown in Figure 7-1. Set the parameters as required and click Create Function.

Figure 7-1 Selecting a function template

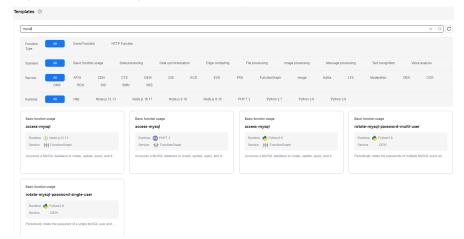

 After the MySQL function is created, choose Configuration > Environment Variables, click Edit Environment Variable. In the displayed dialog box, add environment variables and enable encryption as required (see Figure 7-2), and click OK.

Figure 7-2 Enabling encryption

Edit Environment Variable

Key	Value	Encrypted 💮	
host			Delet
port			Delet
username			Delet
password			Delet
database			Delet
+ Add			•

Available environment variables for addition: 15

NOTE

If the function needs to access RDS APIs, **create an agency** and grant required permissions.

7.2 How Does a Function Access Redis?

Perform the following operations:

- 1. Check whether the Redis instance is deployed in a VPC.
 - If the Redis instance is deployed in a VPC, configure the same VPC and subnet as the Redis instance for the function by referring to Configuring VPC Access.
 - If the Redis instance is built on a public network, obtain its public IP address.
- 2. Compile code for connecting a function to the Redis instance.

FunctionGraph has integrated third-party library **redis-py** in its Python 2.7 and Python 3.6 runtimes. Therefore, you do not need to download any other Redis libraries.

```
# -*- coding:utf-8 -*-
import redis
def handler (event, context):
    r = redis.StrictRedis(host="host_ip",password="passwd",port=6379)
    print(str(r.get("hostname")))
    return "^ ^"
```

NOTE

- If the function fails to access to the Redis instance on a public network, perform the following operations:
 - Modify the redis.conf file to allow access from any IP addresses.
 - Set a password for accessing the Redis instance in the **redis.conf** file.
 - Disable the firewall.
- If the function needs to access DCS APIs, create an agency and grant required permissions.

7.3 What Do I Do If My Function Cannot Connect to Redis Through a VPC?

Symptom

With the same code, the function can connect to Redis 1 through VPC 1, but cannot connect to Redis 2 through VPC 2.

Solution

- 1. Check the current configuration: Redis1 is in VPC1, Redis2 is in VPC2, and the Redis client uses the same set of code.
- 2. Check the log, which shows that the Redis IP address appears as garbled characters when the client tries to connect Redis2 through VPC2.
- 3. Analyze Redis1 and Redis2. They are the same except for their IP addresses and passwords. The Redis2 password was found to contain an at sign (@). As a result, the IP address was incorrectly intercepted and garbled when the Redis was requested.
- 4. Change the password of Redis2 to rectify the fault.

7.4 How Do I Configure External Network Access?

By default, functions deployed in a VPC are isolated from the Internet. If a function needs to access both internal and external networks, add a public NAT gateway for the VPC.

Prerequisites

- 1. You have created a VPC and subnet according to Creating a VPC.
- 2. You have obtained an elastic IP address according to Assigning an EIP.

Procedure of Creating a Public NAT Gateway

- Step 1 Log in to the NAT Gateway console, and click Buy Public NAT Gateway.
- Step 2 On the displayed page, enter gateway information, select a VPC and subnet (for example, vpc-01), and confirm and submit the settings to buy a NAT gateway. For details, see Buying a Public NAT Gateway.
- **Step 3** Click the public NAT gateway name. On the details page that is displayed, click Add an SNAT Rule and click OK.

----End

8 Other FAQs

8.1 How Do I View the Alarm Rules Configured for a Function?

Log in to the Cloud Eye console and view alarm rules.

8.2 Does FunctionGraph Support ZIP Decompiling During Video Transcoding?

No. Please decompile your files before uploading them.

8.3 Will Resources Created During FunctionGraph 2.0 OBT Be Automatically Released When They Expire? Will Them Be Billed?

FunctionGraph 2.0 automatically releases resources when they expire and you will not be billed for them.

8.4 What Is an App in FunctionGraph?

An app acts like a folder. After a function is created, it is automatically categorized into the **default** app and cannot be switched to other apps. In the future, functions will be managed by label for better experience.

8.5 Do I Need to Pay for Cold Start Time?

No. Cold start time will not be metered and you do not have to pay for it.

8.6 Why Am I Seeing a Message Indicating that My Account Was Suspended When Creating a Function?

Your account is in arrears.

8.7 Will the Requests of All My Functions in Different Regions Be Billed?

Yes.

9 Migration from FunctionGraph V1 to V2

9.1 What Compatibility Issues Exist During the Migration?

1. args difference

V1:

args = parser.parse_args()

After migration to V2, it will be:

args = parser.parse_args(args=[])

The **sys.argv** of Python runtime varies between the two versions.

For V2, it is ['/home/snuser/runtime/python3.6/server.py', '127.0.0.1:31536', '/opt/function/code'], whose last two parameters are not available for V1.

2. asyncio difference

V1:

loop = asyncio.get_event_loop()
loop.run_until_complete(func(arg1, arg2))
loop.close()

After migration to V2, it will be:

loop_tmp = asyncio.new_event_loop()
asyncio.set_event_loop(loop_tmp)
loop = asyncio.get_event_loop()
loop.run_until_complete(func(arg1, arg2))
loop.close()

In V1, **asyncio.get_event_loop()** obtains the current event loop from the OS thread (main thread). It will throw **RuntimeError** in V2, because Python runtime of V2 does not run functions in the main thread.

To use **asyncio** in V2, create an event loop.

9.2 Why Can't I Print Logs of a Python 2.7 Function After the Execution of reload(sys)?

Try printing logs with **context.getLogger()**.

log = context.getLogger() log.info("test")